


IGLOO SPLITTING ROCKS AT ONCE

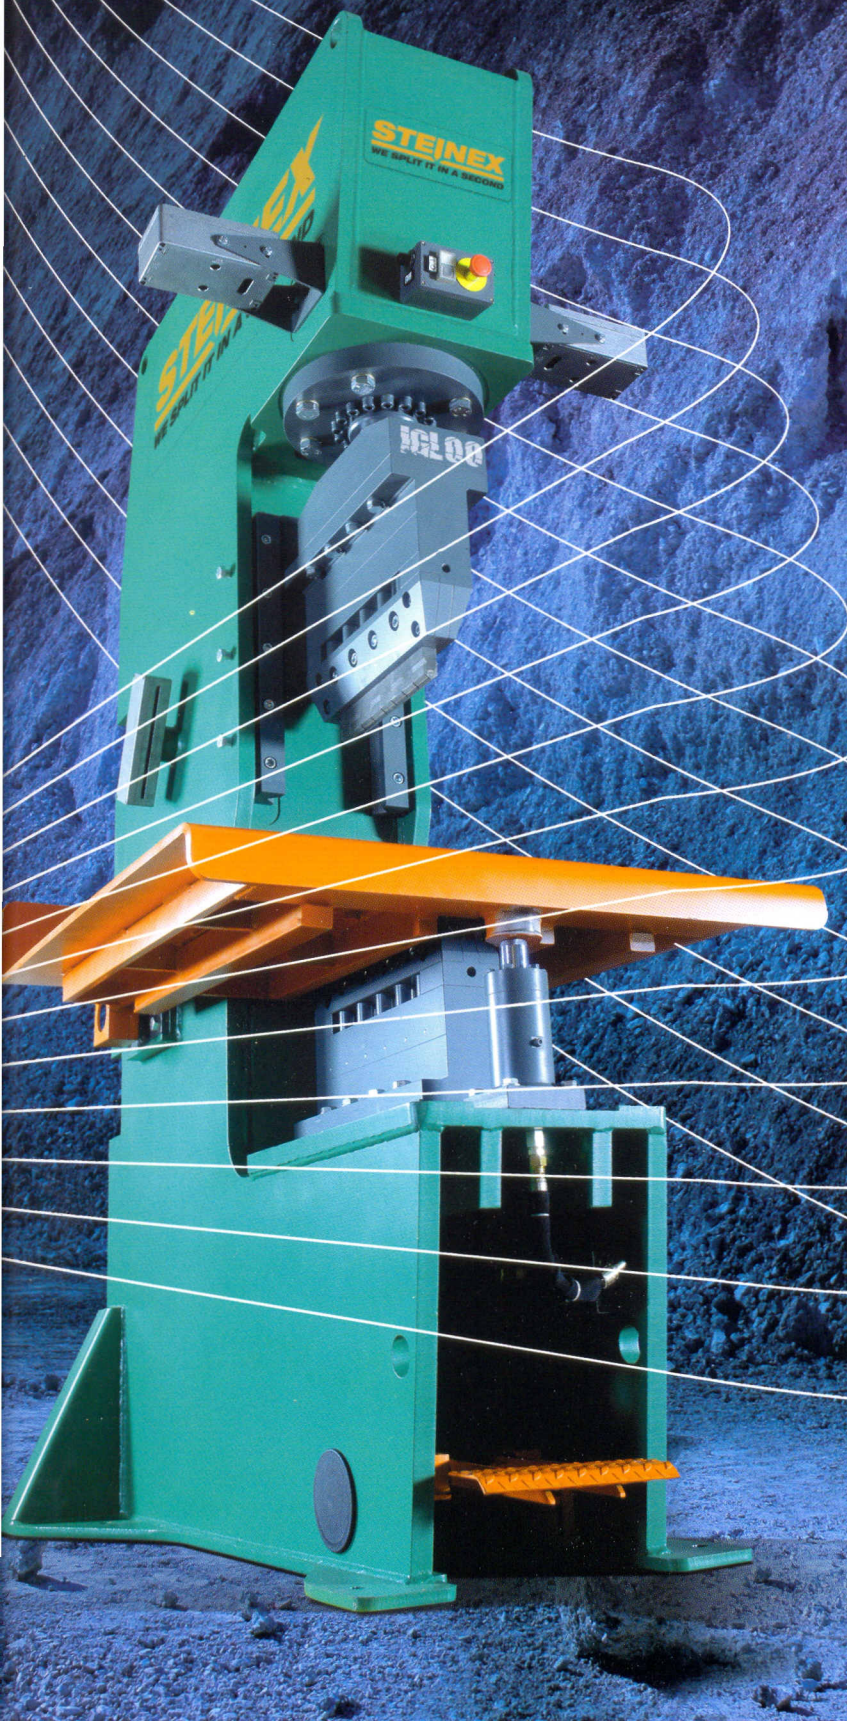

COBBLES, SETT PAVINGS AND WALL STONES

Igloo machines are strong, versatile and above all fast. They are outstanding for the speed with which they can produce large quantities of split products.

Today they are used to split all types of stone. Their design makes them perfect to produce a variety of cobbles, sett pavings and wall stones.

Igloo machines are small when compared with the other ones but they are sturdy and resilient.

They are extremely easy to use and cope perfectly with the constant stresses that come from continuous work, even when working in the toughest conditions.

Each machine is hydraulically operated with a noise reduction power unit.



IGLOO SPLITTING ROCKS AT ONCE

Model:		160	240		320		400	480		600
Technical specifications:										
A (blade length)	mm	160	240	240	320	320	400	480	480	600
B (splitting height)	mm	180	320	320	320	320	350	450	450	550
Blade adaptation	RB	1	2	2	1	1	2	2	2	3
Splitting force	t	20	40	60	40	60	70	100	120	180
Bench cylinders (1)	nr	1	1	1	1	1	1	4	4	/
Bench rollers (2)	nr	/	/	/	/	/	6	6	6	/
Manipulator 1M with clamps	nr	/	/	/	/	/	/	1	1	1
Power supply	kW	4	7,5	7,5	7,5	7,5	7,5	7,5	7,5	7,5

Dimensions and weights:

C (width)	mm	1000	1000	1000	1000	1000	1200	1200	1200	1200
D (height)	mm	2250	2650	2650	2650	2650	2700	3000	3000	3450
E (depth)	mm	1650	1260	1260	1400	1400	1550	1760	1760	1970
F (bench height)	mm	950	950	950	950	950	950	950	950	/
G (hydraulic unit width)	mm	/	1360	1360	1360	1360	1360	1360	1360	1360
H (hydraulic unit height)	mm	/	1200	1200	1200	1200	1200	1200	1200	1200
I (hydraulic unit depth)	mm	/	650	650	650	650	650	650	650	650
L (hydraulic unit distance)	mm	/	1300	1300	1300	1300	1300	1300	1300	1300
Machine weight	kg	1600	2190	2250	2390	2450	3500	3920	4020	6700
Hydraulic unit weight	kg	/	400	400	400	400	400	400	400	400

